

MSZ-E SERIES

Developed to complement modern interior room décor, Kirigamine ZEN air conditioners are available in three colours specially chosen to blend in naturally wherever installed.



MSZ-EF18-50VE3B



reddot award 2015 winner



Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.



Energy-efficient Operation




All models in the series have achieved high energy-savings rating, and are contributing to reduced energy consumption in homes, offices and a range of other settings. Offered in a variety of output capacities and installation patterns, the vast applicability promises an ideal match for any user.

Indoor \ Outdoor	Rank A for single connection MUZ-EF25/35VE(H) MUZ-EF42/50VE	Compatibility								
		MXZ								
		2D33VA	2D42VA2	2D53VA2	3E54VA	3E68VA	4E72VA	4E83VA	5E102VA	6D122VA
MSZ-EF18VE3	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
MSZ-EF22VE3	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
MSZ-EF25VE3	A+++ / A++(A+++)	✓	✓	✓	✓	✓	✓	✓	✓	✓
MSZ-EF35VE3	A+++ / A++(A++)		✓	✓	✓	✓	✓	✓	✓	✓
MSZ-EF42VE3	A++ / A+			✓	✓	✓	✓	✓	✓	✓
MSZ-EF50VE3	A++ / A+			✓	✓	✓	✓	✓	✓	✓

*VEH


Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Silent Mode" fan speed setting provides super-quiet operation as low as 21dB for EF18/22/25/35 models. This unique feature makes the Kirigamine ZEN series ideal for use in any situation.

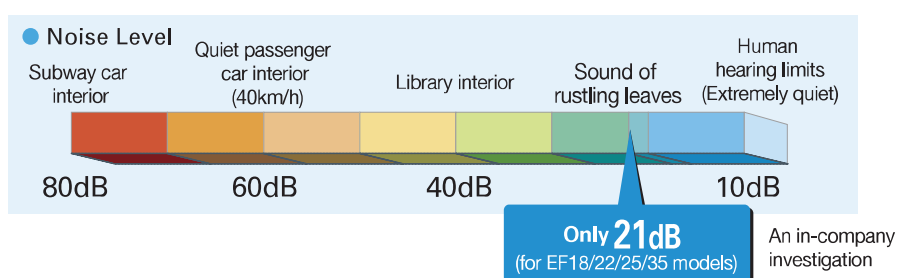


Superior Exterior and Operating Design Concept

The indoor unit of the Kirigamine ZEN keeps its amazingly thin form even during operation. The only physical change notable is the movement of the variable vent. As a result, a slim attractive look is maintained.

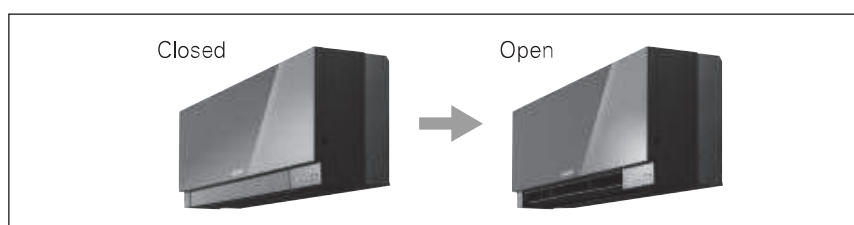

Low Standby Power

Electrical devices consume standby power even when they are not in actual use. While we obviously strive to reduce power consumption during actual use, reducing this wasted power that cannot be seen is also very important.

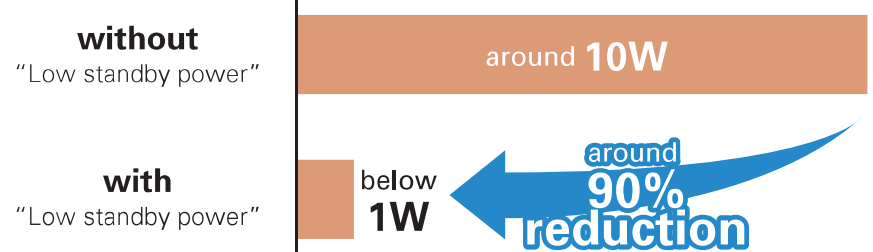

Outdoor Units for Cold Region (25/35)

Single split-type outdoor units are available in both standard and heater-equipped units. An electric heater is installed in each unit to prevent freezing in cold outdoor environments.

Standard Units



MUZ-EF25/35VE

Heater Installed



MUZ-EF25/35VEH

MSZ-E SERIES



Indoor Unit

R32 R410A



MSZ-EF18/22/25/35/42/50VE3W White



MSZ-EF18/22/25/35/42/50VE3S Silver



MSZ-EF18/22/25/35/42/50VE3B* Black



Outdoor Unit

R410A



MUZ-EF25/35VE(H),42VE



MUZ-EF50VE

Remote Controller



*Soft-dry Cloth is enclosed with Black models.



Type		Inverter Heat Pump									
Indoor Unit		MSZ-EF18VE3	MSZ-EF22VE3	MSZ-EF25VE3	MSZ-EF25VE3	MSZ-EF35VE3	MSZ-EF35VE3	MSZ-EF42VE3	MSZ-EF50VE3		
Outdoor Unit		for MXZ connection		MUZ-EF25VE	MUZ-EF25VEH	MUZ-EF35VE	MUZ-EF35VEH	MUZ-EF42VE	MUZ-EF50VE		
Refrigerant		R410A ⁽¹⁾									
Power Supply		Outdoor Power supply									
Outdoor (V / Phase / Hz)		230/Single/50									
Cooling	Design load	kW	-	-	2.5	2.5	3.5	3.5	4.2	5.0	
	Annual electricity consumption ⁽²⁾	kWh/a	-	-	103	103	144	144	192	244	
	SEER ⁽⁴⁾		-	-	8.5	8.5	8.5	8.5	7.7	7.2	
	Energy efficiency class			-	-	A+++	A+++	A+++	A+++	A++	A++
	Capacity	Rated	kW	-	-	2.5	2.5	3.5	3.5	4.2	5.0
Heating (Average Season) ⁽⁵⁾	Total Input	Rated	kW	-	-	0.545	0.545	0.910	0.910	1.280	1.560
	Design load	kW	-	-	2.4(-10°C)	2.4(-10°C)	2.9(-10°C)	2.9(-10°C)	3.8(-10°C)	4.2(-10°C)	
	Declared Capacity	at reference design temperature	kW	-	-	2.4(-10°C)	2.4(-10°C)	2.9(-10°C)	2.9(-10°C)	3.8(-10°C)	4.2(-10°C)
		at bivalent temperature	kW	-	-	2.4(-10°C)	2.4(-10°C)	2.9(-10°C)	2.9(-10°C)	3.8(-10°C)	4.2(-10°C)
		at operation limit temperature	kW	-	-	2.0(-15°C)	1.6(-20°C)	2.4(-15°C)	1.7(-20°C)	3.4(-15°C)	3.5(-15°C)
	Back up heating capacity	kW	-	-	0.0(-10°C)	0.0(-10°C)	0.0(-10°C)	0.0(-10°C)	0.0(-10°C)	0.0(-10°C)	
	Annual electricity consumption ⁽²⁾	kWh/a	-	-	716	730	882	910	1155	1309	
	SCOP ⁽⁴⁾		-	-	4.7	4.6	4.6	4.5	4.6	4.5	
	Energy efficiency class			-	-	A++	A++	A++	A+	A++	A+
	Capacity	Rated	kW	-	-	3.2	3.2	4.0	4.0	5.4	5.8
Total Input	Rated	kW	-	-	1.1-4.2	1.1-4.2	1.8-5.5	1.8-5.5	1.4-6.3	1.6-7.5	
Operating Current (Max)		A	-	-	7.3	7.3	8.5	8.5	9.5	12.4	
Indoor Unit	Input	Rated	kW	0,027	0,027	0,027	0,027	0,031	0,031	0,034	
	Operating Current(Max)	A	-	0,3	0,3	0,3	0,3	0,3	0,3	0,4	
	Dimensions	H*W*D	mm	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	299-885-195	
	Weight	kg	-	11,5	11,5	11,5	11,5	11,5	11,5	11,5	
	Air Volume (SLo-Lo-Mid-Hi-SH) ⁽³⁾ (Dry/Wet)	Cooling	m ³ /min	-	4,0-4,6-6,3-8,3-10,5	4,0-4,6-6,3-8,3-10,5	4,0-4,6-6,3-8,3-10,5	4,0-4,6-6,3-8,3-10,5	4,0-4,6-6,3-8,3-10,5	5,8-6,6-7,7-8,9-10,3	5,8-6,8-7,9-9,3-11,0
		Heating	m ³ /min	-	4,0-4,6-6,2-8,9-11,9	4,0-4,6-6,2-8,9-11,9	4,0-4,6-6,2-8,9-11,9	4,0-4,6-6,2-8,9-11,9	4,0-4,6-6,2-8,9-12,7	5,5-6,3-7,8-9,9-12,7	6,4-7,3-9,0-11,1-13,2
	Sound Level (SPL) (SLo-Lo-Mid-Hi-SH) ⁽³⁾	Cooling	dB(A)	-	21-23-29-36-42	21-23-29-36-42	21-23-29-36-42	21-23-29-36-42	21-24-29-36-42	28-31-35-39-42	30-33-36-40-43
		Heating	dB(A)	-	21-24-29-37-45	21-24-29-37-45	21-24-29-37-45	21-24-29-37-45	21-24-30-38-46	28-30-35-41-48	30-33-37-43-49
	Sound Level (PWL)	Cooling	dB(A)	-	60	60	60	60	60	60	60
	Dimensions		H*W*D	mm	-	-	550-800-285	550-800-285	550-800-285	550-800-285	880-840-330
Outdoor Unit	Weight	kg	-	-	30	30	35	35	35	54	
	Air Volume	Cooling	m ³ /min	-	-	32,6	32,6	33,6	33,6	35,2	44,6
		Heating	m ³ /min	-	-	32,2	32,2	33,6	33,6	33,6	44,6
	Sound Level (SPL)	Cooling	dB(A)	-	-	47	47	49	49	50	52
		Heating	dB(A)	-	-	48	48	50	50	51	52
	Sound Level (PWL)	Cooling	dB(A)	-	-	58	58	61	61	62	65
Operating Current (Max)		A	-	-	7,0	7,0	8,2	8,2	9,2	12,0	
Breaker Size		A	-	-	10	10	10	10	10	16	
Ext. Piping	Diameter	Liquid/Gas	mm	-	-	6,35 / 9,52	6,35 / 9,52	6,35 / 9,52	6,35 / 9,52	6,35 / 9,52	
	Max.Length	Out-In	m	-	-	20	20	20	20	30	
	Max.Height	Out-In	m	-	-	12	12	12	12	15	
Guaranteed Operating Range (Outdoor)		Cooling	°C	-	-	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
		Heating	°C	-	-	-15 ~ +24	-20 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	

(1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO₂, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R410A is 2088 in the IPCC 4th Assessment Report.

(2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.

(3) SHI: Super High

(4) SEER, SCOP and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011. The temperature conditions for calculating SCOP are based on "Average Season".

(5) Please see page 63 for heating (warmer season) specifications.